



Setting Up Email Addresses

To set up email addresses for cluster users, access the MCS and select **System Settings>Email** as shown.

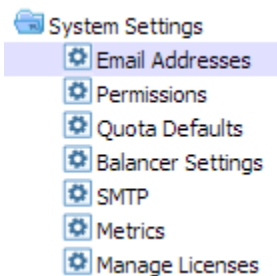

In the Configure Email Addresses dialog, you can specify whether MapR gets user email addresses from an LDAP directory, or uses a company domain:

- **Use Company Domain** - specify a domain to append after each username to complete each user's email address
- **Use LDAP** - obtain each user's email address from an LDAP server

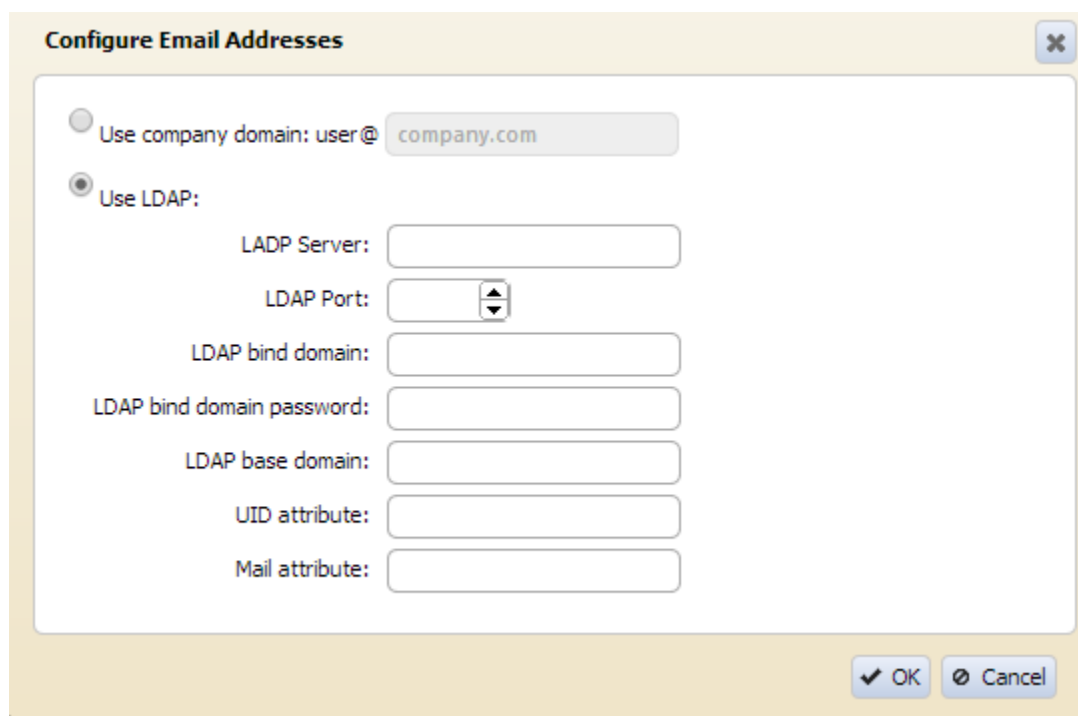

The 'Configure Email Addresses' dialog box has a title bar with a close button. It contains two radio button options: 'Use company domain' and 'Use LDAP'. The 'Use company domain' option is currently selected, and its text field contains 'company.com'. The 'Use LDAP' option is unselected. Below the 'Use LDAP' option are several input fields: 'LDAP Server', 'LDAP Port' (with a spinner), 'LDAP bind domain', 'LDAP bind domain password', 'LDAP base domain', 'UID attribute', and 'Mail attribute'. At the bottom right, there are 'OK' and 'Cancel' buttons.